

high performance inductive PD sensors



HFCT 30mm

Techimp HFCT is an inductive sensor for partial discharge measurements. It is suitable for on/off line PD tests on many electrical systems (cables, transformers, rotating machine, etc..). It has to be applied to the ground connection of the system to be tested.

A BNC termination is available to connect the HFCT to the Techimp PD detection /analyzer unit through a coaxial cable. The arrow indicates the output voltage (V_{out}) direction in comparison with the input current (I_{in}) direction: when the sensor is installed with the arrow directed to ground junction, the detected voltage signal (V_{out}) has the same phase as the input current (I_{in}) .

Benefits


- Maintenance free
- High sensitivity and reliability
- Robust and easy to use
- Safety

Specifications

Bandwidth Max Sensitivity (V_{out} / I_{in} at 42 MHz, 50 Ω load) Load Impedance Vout (no load connected) @ 50Hz Vout (no load connected) @ PD frequency Hole dimension Electric insulation Operating temperature

1 MHz ÷ 60MHz 17 mV/mA 50 Ω 0,6Vpp @ 100A 0,4Vpp @ 100pC Φ 30 mm 25kVpeak (for 1 hour) -20°C +70 C

Frequency Response

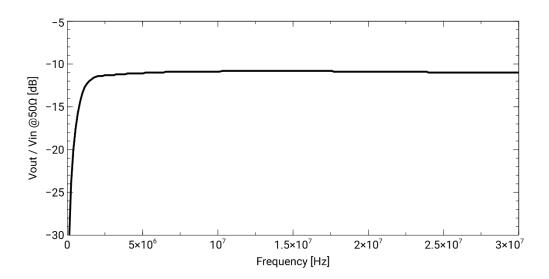

Mechanical Specification











MVAC CABLE





IERA OR GIS GIL GIB SWITCH

OUTDO OR INSULA TOR HV TRAFO

MV TRAFO TA/TV

Several different sensors are available, fully compatible with Techimp Global Diagnostic platform. They can be freely combined at customer needs provided they can be applied for the specific application.





TECHIMP - ALTANOVA GROUP Via Toscana 11, 40069 Zola Predosa (Bo) - Italy T +39 051 199 86 050 Email sales@altanova-group.com



ISA - ALTANOVA GROUP Via Prati Bassi 22, 21020 Taino (Va) - Italy T +39 0331 95 60 81 Email isa@altanova-group.com



Intellisaw - ALTANOVA GROUP 100 Burtt Rd Andover, MA 01810, USA T+1 978-409-1534 Email contact@intellisaw.com